



ISO 9001:2008 Certified Company

dintech

dintech
VALVES Pvt. Ltd.

An ISO 9001:2008 Company

Manufacturers of all kinds of
INDUSTRIAL VALVES

W: www.dintechvalve.co.in

E: info@dintechvalve.co.in



About Us

Dintech Valves Pvt. Ltd. a leading valve manufacturing company established 15 years back has carved a niche in the field of manufacture of Industrial Valves. Recently it has expanded its capacity and has entered into the bigger segment with **dintech** brand Industrial Valves to cater in a big way to Oil & Natural Gas Industry, Petroleum & Petrochemical, Fertilizer, Chemical and Process Industry.

The organization manufactures Gate, Globe, Check, Ball, Butterfly, Wafer Type Check Valve, Strainers etc. in all size and class with any material of construction as per customer requirement adhering to National and International Standards such as API 600, API 602, BS 1873, BS 1868, BS 5351, BS 5352 etc. The organization has excellent inhouse manufacturing and testing facilities with state of art technology for Design and Manufacture of Industrial Valves. The organization has an added advantage of experienced and trained personnel working with the motto of Quality Products, Best Services and Timely Delivery at competitive Prices to remain customer's first choice.

The organization has an outstanding system with adequate controls right from the receipt of raw materials to the dispatch of finished products resulting into Quality Products with Satisfied Customers. The organization offers products under all known third party inspection agencies.

The organization has successfully implemented the Quality Management System in its true spirit and continual improvement is constantly adhered to in all areas of manufacture.

Quality Policy

We at Dintech Valves Pvt. Ltd. shall always strive to achieve highest level of Customer Satisfaction and shall aim to share a long lasting & growing relationship with our customer.


To achieve this , We shall use technology in developing better products and capabilities competent with the global standards at a cost which is value for money.

We have constantly pursuit for Value Addition, Continuous Improvement and dedicated service provisions in all aspects of our business. We also fulfill statutory and legal requirement for the products and organizations.

We are also committed to comply requirements of ISO 9001-2008 and continually improve the effectiveness of our Quality Management System for the benefit of our customers.

To achieve customer satisfaction through

1. Supply Good Quality Product
2. True & Fast Communication
3. Continual Improvement in all processes
4. Timely Delivery at Competitive Price with No Compromise In Quality
5. After Sales & Services

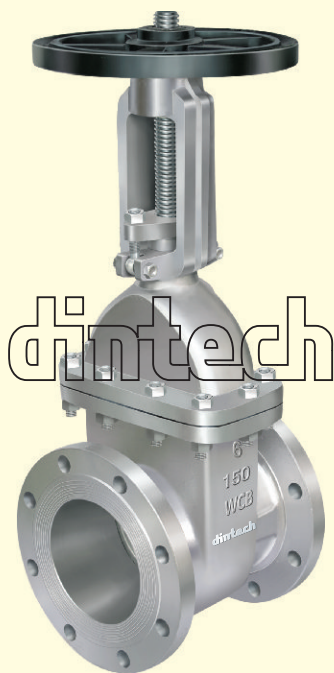

Size : 2" (50 mm) to 48" (1200 mm)
 Class : 150# / 300# / 600# / 900# / 1500#
 End : Flanged End to ASME B16.5 RF
 Butt Weld Ends to ASME B16.25
 Design / Mfg. Std. : API 600 / API 603 / BS 1414
 Face to face : ASME B16.10
 Inspection & Testing Std. : API 598
 *Special Material & Higher Size/Class Valves also available on request.

Gate Valve

150# / 300# / 600# / 900# / 1500#

TEST PRESSURE				
TESTING	HYDRAULIC			PNUMATIC
	150#	300#	600#	—
BODY	425 PSIG	1100 PSIG	2175 PSIG	—
BACK SEAT	300PSIG	800 PSIG	1600 PSIG	—
SEAT	300PSIG	800 PSIG	1600 PSIG	80 PSIG

														@ 150#
SIZE	PORT	L	L1	H	H1	ØWH	ØD	b	Øg	f	Øj	N	K:Pcd.	
50	51	178	216	302	360	200	150	16.3	92.1	2.0	19.1	4	120.7	
65	64	190	241	355	425	200	180	17.9	104.8	2.0	19.1	4	139.7	
80	76	203	281	390	470	200	190	19.5	127.0	2.0	19.1	4	152.4	
100	102	229	305	468	577	250	230	24.3	157.2	2.0	19.1	8	190.5	
125	127	254	381	550	685	250	255	24.3	185.7	2.0	22.2	8	215.9	
150	152	267	403	630	790	300	280	25.9	215.9	2.0	22.2	8	241.3	
200	203	292	419	800	1013	350	345	29.0	269.9	2.0	22.2	8	298.5	
250	254	330	457	950	1215	400	405	30.6	323.8	2.0	25.4	12	362.0	
300	305	356	502	1110	1425	400	485	32.2	381.0	2.0	25.4	12	431.8	
350	337	381	572	1140	1500	550	535	35.4	412.8	2.0	28.6	12	476.3	
400	387	406	610	1365	1755	550	595	37.0	469.9	2.0	28.6	16	539.8	
450	438	432	660	1540	2000	600	635	40.1	533.4	2.0	31.8	16	577.9	
500	489	457	711	1690	2210	600	700	43.3	584.2	2.0	31.8	20	635.0	
600	590	508	813	2100	2725	650	815	48.1	692.2	2.0	34.9	20	749.0	

SIZE	PORT	L	ØD	b	Øg	F	Øj	N	K:Pcd.
650	650	559	785	41.8	711	2.0	22.2	36	744.5
700	700	610	835	45.0	762	2.0	22.2	40	795.3
750	750	610	885	45.0	813	2.0	22.2	44	846.1
900	900	711	1055	52.9	972	2.0	25.4	44	1009.6

Note: Flanged ends to ASME B16.47 series B, 24" & above valve



Size : 2" (50 mm) to 16" (400 mm)
 Class : 150# / 300# / 600# / 900#
 End : Flanged End to ASME B16.5 RF
 Butt Weld Ends to ASME B16.25
 Design : BS 1873
 Face to face : ASME B 16.10
 Inspection & Testing Std. : API 598 / BSEN 12266 PI
 *Special Material & Higher Size also available on request.

Globe Valve

150# / 300# / 600# / 900#

TEST PRESSURE				
TESTING	HYDRAULIC			PNUMATIC
	150#	300#	600#	—
BODY	425 PSIG	1100 PSIG	2175 PSIG	—
BACK SEAT	300PSIG	800 PSIG	1600 PSIG	—
SEAT	300PSIG	800 PSIG	1600 PSIG	80 PSIG

														@ 150#
SIZE	PORT	L	L1	H	H1	ØWh	ØD	b	Øg	f	Øj	N	K:PCD	
50	51	203	203	270	290	200	150	16.3	92.1	2.0	19.1	4	120.7	
65	64	216	216	298	320	250	180	17.9	104.8	2.0	19.1	4	139.7	
80	76	241	241	318	343	250	190	19.5	127.0	2.0	19.1	4	152.4	
100	102	292	292	378	410	350	230	24.3	157.2	2.0	19.1	8	190.5	
125	127	356	356	390	430	350	255	24.3	185.7	2.0	22.2	8	215.9	
150	152	406	406	435	480	400	280	25.9	215.9	2.0	22.2	8	241.3	
200	203	495	495	523	582	500	345	29.0	269.9	2.0	22.2	8	298.5	
250	254	622	622	627	700	500	405	30.6	323.8	2.0	25.4	12	362.0	
300	305	698	698	740	825	600	485	32.2	381.0	2.0	25.4	12	431.8	

SIZE	PORT	L	L1	ØD	b	Øg (RFD)	Øg (RFH)	Øj	N	K:Pcd.
350	337	787	787	535	35.4	412.8	2.0	28.6	12	476.3
400	387	914	914	595	37.0	469.9	2.0	28.6	16	539.8



Size : 2" (50 mm) to 36" (900 mm)
 Class : 150# / 300# / 600# / 900#
 End : Flanged End to ASME B16.5 RF
 Design : BS 1868 / API 6D
 Face to Face : ASME B16.10 / API 6D
 Inspection & Testing Std. : API 6D / API 598 / BSEN 12266PI
 *Special Material & Higher Size also available on request.

Swing Check Valve

150# / 300# / 600# / 900#


TEST PRESSURE				
TESTING	HYDRAULIC			PNEUMATIC
	150#	300#	600#	80 PSIG
BODY	450 PSIG	1115 PSIG	2225 PSIG	80 PSIG
BACK SEAT	315 PSIG	825 PSIG	1630 PSIG	80 PSIG
SEAT	315 PSIG	825 PSIG	1630 PSIG	80 PSIG

@ 150#

SIZE	PORT	L	L1	H	ØD	b	Øg	f	ØJ	N	K:PCD
50	54	203	203	130	150	16.3	92.1	2.0	19.1	4	120.7
65	64	216	216	140	180	17.9	104.8	2.0	19.1	4	139.7
80	76	241	241	162	190	19.5	127.0	2.0	19.1	4	152.4
100	102	292	292	187	230	24.3	157.2	2.0	19.1	8	190.5
125	127	330	330	217	255	24.3	185.7	2.0	22.2	8	215.9
150	152	356	356	235	280	25.9	215.9	2.0	22.2	8	241.3
200	203	495	495	285	345	29.0	269.9	2.0	22.2	8	298.5
250	254	622	622	338	405	30.6	323.8	2.0	25.4	12	362.0
300	305	698	698	380	485	32.2	381.0	2.0	25.4	12	431.8
350	337	787	787	415	535	35.4	412.8	2.0	28.6	12	476.3
400	387	864	864	455	595	37.0	469.9	2.0	28.6	16	539.8
450	438	978	978	505	635	40.1	533.4	2.0	31.8	16	577.9
500	489	978	978	560	700	43.3	584.2	2.0	31.8	20	635.0
600	590	1295	1295	615	815	48.1	692.2	2.0	34.9	20	749.0

SIZE	PORT	L	ØD	b	Øg	F	Øj	N	K:Pcd.
650	650	1295	785	41.8	711	2.0	22.2	36	744.5
700	700	1448	835	45.0	762	2.0	22.2	40	795.3
750	750	1524	885	45.0	813	2.0	22.2	44	846.1
900	900	1956	1055	52.9	972	2.0	25.4	44	1009.6

Note: Flanged ends to ASME B16.47 series B, for 26" & above valve

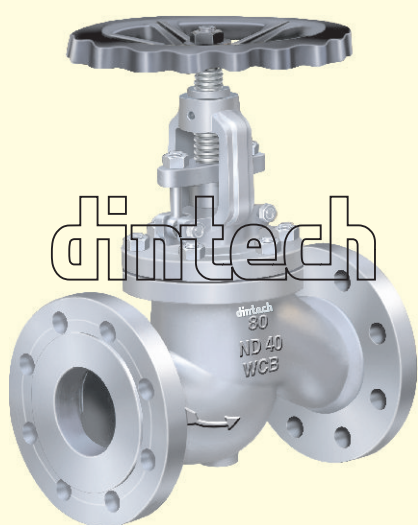

Size : 1" (25 mm) to 12" (300 mm)
 Class : PN 16 / PN 25 / PN 40
 End : Flanged End to DIN 2545 (PN 40)
 Design : BS 1873 / DIN 3356
 Face to Face : DIN 3202 (Part-1)
 Inspection & Testing Std. : API 598
 *Special Material & Higher Size also available on request.

DIN Globe Valve

(PN 16 / PN 25 / PN 40)

TEST PRESSURE, kg / sq. cm.			
TESTING	HYDRAULIC		PNEUMATIC
	PN 16	PN 40	
BODY	24	60	-
BACK SEAT	16	40	-
SEAT	16	40	7

@ PN 40 #

SIZE	PORT	L	H	H1	ØWh	ØD	b	Øg	f	ØJ	N	K:PCD
25	25	160.0	225	238	175	115	18	68	2	14	4	85
32	32	180.0	240	254	175	140	18	78	2	18	4	100
40	38	200.0	268	284	200	150	18	88	3	18	4	110
50	51	230.0	278	298	200	165	20	102	3	18	4	125
65	64	290.0	306	328	250	185	22	122	3	18	8	145
80	76	310.0	328	353	250	200	24	138	3	18	8	160
100	102	350.0	390	422	350	235	24	162	3	22	8	190
150	152	480.0	450	495	400	300	28	218	3	26	8	250
200	203	600.0	543	602	480	375	34	285	3	30	12	320
250	254	730.0	651	724	480	450	38	345	3	33	12	385
300	305	850.0	772	857	600	515	42	410	4	33	16	450



"Y" Strainer

PN 16 / PN 25 / PN 40 / 150# / 300#

TEST PRESSURE, kg / sq. cm.

TESTING	HYDRAULIC			
	PN 16	PN 40	150#	300#
BODY	24	60	31	78

@ PN 40 #

SIZE	PORT	L	H	H1	ØWh	ØD	b	Øg	f	ØJ	N	K:PCD
50	51	230	278	298	200	165	20	102	3	18	4	125
65	64	290	306	328	250	185	22	122	3	18	8	145
80	76	310	328	353	250	200	24	138	3	18	8	160
100	102	350	390	422	350	235	24	162	3	22	8	190
150	152	480	450	495	400	300	28	218	3	26	8	250
200	203	600	543	602	480	375	34	285	3	30	12	320
250	254	730	651	724	480	450	38	345	3	33	12	385
300	305	850	772	857	600	515	42	410	3	33	16	450
350	337	980	-	-	-	580	54	465	4	36	16	510
400	387	1100	-	-	-	660	60	535	4	39	16	585
450	438	1200	-	-	-	685	66	560	4	39	20	610
500	489	1250	-	-	-	755	72	615	4	42	20	670
600	590	1450	-	-	-	890	84	735	5	48	20	795

Size : ½" (15 mm) to 2" (50 mm) - Threaded End
 2" (50 mm) to 24" (600 mm) - Flanged End
 Class : 150# / 300# / 600# / 900# / PN6 / PN25 / PN40
 End : Flanged / Threaded / Socket Weld Ends
 Design : Mfg. Standard
 Features : Strainer Screens - Perforeted + Wire mesh
 *Special Material & Higher Size also available on request.



(A) Center Disc Butterfly Valve


Size : 2" (50 mm) to 36" (900 mm)
 Class : PN 16 upto 12" and above PN 10
 End : Wafer Type / Lug Type / Flange Ends
 Design : API-609 - Category : A
 Seat : Moulded Seat as NBR / EPDM / SILICON / VITON / PTFE
 Operation : Lever / Gear / Actuator / Electric Operated
 *Special Material & Higher Size also available on request.

(B) Offset Disc Butterfly Valve

Size : 2" (50 mm) to 36" (900 mm)
 Class : PN 10 / PN 16
 End : Wafer Type / Lug Type / Flange Ends
 Design : API-609 - Category : B / AWWA C504
 Seat : Moulded Seat Lip Seal Design
 NBR / EPDM / SILICON / VITON etc.
 Operation : Lever / Gear / Actuator / Electric Operated

Center Disc Design Butterfly Valve

	VALVE DIMENSION									TOP PLATE DRILLING			WEIGHT*
SIZE	A	B	C	D	F	G	H	KEY WAY	Q	PCD	N	N	kg.
40	40	77	85	34	31.7	12.7	8	-	22	70	4	9	2.7
50	50	95	100	43	31.7	14.2	9.5	-	26	70	4	9	3
65	65	117	115	46	31.7	14.2	9.5	-	47	70	4	9	4.1
80	75	126	125	46	31.7	14.2	9.5	-	60	70	4	9	4.7
100	100	160	150	53	31.7	15.9	11	-	85	70	4	9	5.9
125	125	182	155	56	31.7	15.9	11	-	113	70	4	9	7.8
150	152	210	170	56	31.7	19	12.7	-	144	102	4	11	13
200	203	265	205	61	31.7	22.2	18.5	-	195	102	4	11	18
250	252	325	255	69	50	28.6	-	6.3X6.3	245	125	4	11	23.4
300	300	366	275	78	50	28.6	-	6.3X6.3	313	125	4	11	40
350	337	438	305	78	65	35	-	7.9X7.9	330	140	4	18	57
400	387	490	335	102	65	41.2	-	9.5X9.5	376	140	4	18	78
450	438	539	368	114	65	47.6	-	12.7X9.5	425	140	4	18	101
500	489	595	400	127	65	47.6	-	12.7X9.5	475	140	4	18	134
600	587	696	495	154	75	47.6	-	12.7X9.5	570	165	4	18	225

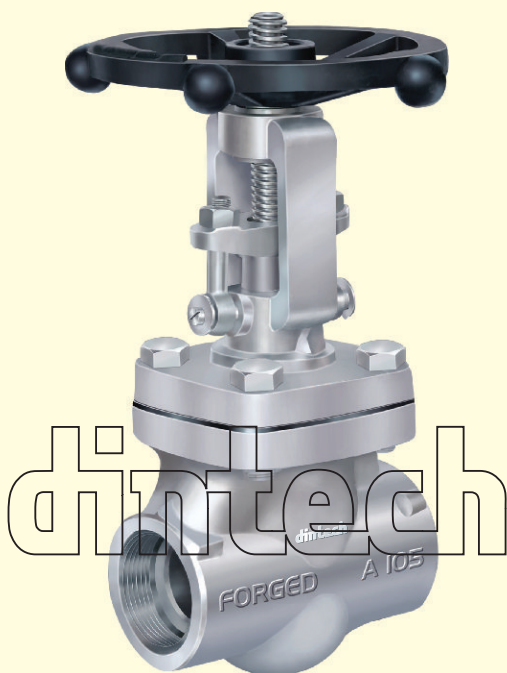

Size : 1/4" (6 mm) to 2" (50 mm)
 Class : 800# / 1500# / 2500#
 End : Threaded / Socket Weld / Butt Weld Ends
 Design : API 602/BS 5352 / B 16.11 / B 16.25
 Features : Bolted / Welded Bonnet
 *Special Material & Higher Size also available on request.

Forged Steel Gate Valve

800# / 1500# / 2500#


TEST PRESSURE				
TESTING	HYDRAULIC			PNEUMATIC
	800#	1500#	2500#	
BODY	3000 PSIG	5400 PSIG	9060 PSIG	-
BACK SEAT	2200 PSIG	4000 PSIG	6800 PSIG	-
SEAT	2200 PSIG	4000 PSIG	6800 PSIG	80 PSIG

@ 800#

SIZE	L	H	H1	ØWH	SCR. ENDS		SW. ENDS		
					ØC	E	ØD	Max.	Min.
15	85	152	165	90	1/2"	13.56	22.22	21.72	9.65
20	92	161	176	90	3/4"	13.87	27.56	27.05	12.7
25	105	175	198	90	1"	17.35	34.29	33.78	12.7
40	127	240	278	145	1.1/2"	18.38	49.15	48.64	12.7
50	140	255	298	145	2"	19.23	61.62	61.11	15.75

@ 1500#

SIZE	L	H	H1	ØWH	SCR. ENDS		SW. ENDS		
					ØC	E	ØD	Max.	Min.
15	92	161	176	90	1/2"	13.56	22.22	21.72	9.65
20	105	175	198	90	3/4"	13.87	27.56	27.05	12.7
25	127	240	278	145	1"	17.35	34.29	33.78	12.7
40	140	255	298	145	1.1/2"	18.38	49.15	48.64	12.7

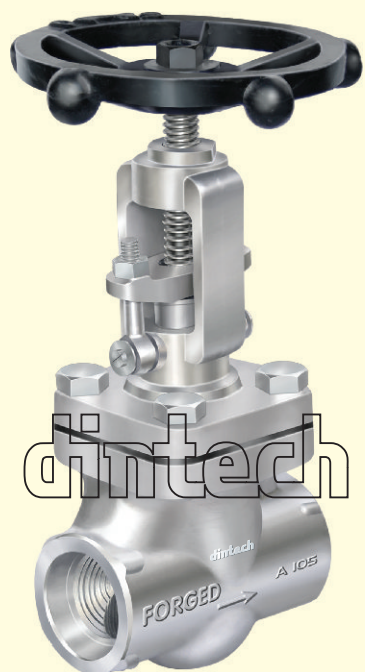

Size : 1/4" (6 mm) to 2" (50 mm)
 Class : 800# / 1500# / 2500#
 End : Threaded / Socket Weld / Butt Weld Ends
 Design : API 602/BS 5352 / B 16.11 / B 16.25
 Features : Bolted / Welded Bonnet
 *Special Material & Higher Size also available on request.

Forged Steel Globe Valve

800# / 1500# / 2500#


TEST PRESSURE				
TESTING	HYDRAULIC			PNEUMATIC
	800#	1500#	2500#	
BODY	3000 PSIG	5400 PSIG	9060 PSIG	-
BACK SEAT	2200 PSIG	4000 PSIG	6800 PSIG	-
SEAT	2200 PSIG	4000 PSIG	6800 PSIG	80 PSIG

@ 800#

SIZE	L	H	H1	ØWH	SCR. ENDS		SW. ENDS		
					ØC	E	ØD	Max.	Min.
15	85	162	170	90	1/2"	13.56	22.22	21.72	9.65
20	92	170	180	90	3/4"	13.87	27.56	27.05	12.7
25	105	190	202	90	1"	17.35	34.29	33.78	12.7
40	127	243	260	145	1.1/2"	18.38	49.15	48.64	12.7
50	140	255	272	145	2"	19.23	61.62	61.11	15.75

@ 1500#

SIZE	L	H	H1	ØWH	SCR. ENDS		SW. ENDS		
					ØC	E	ØD	Max.	Min.
15	92	170	180	90	1/2"	13.56	22.22	21.72	9.65
20	105	190	202	90	3/4"	13.87	27.56	27.05	12.7
25	127	243	260	145	1"	17.35	34.29	33.78	12.7
40	140	255	272	145	1.1/2"	18.38	49.15	48.64	12.7

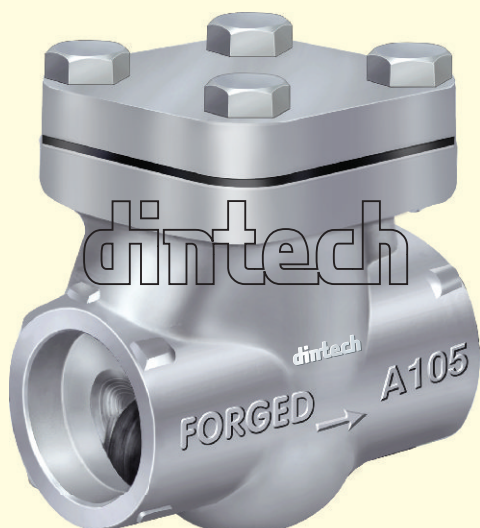

Forged Steel Lift Check Valve

800# / 1500# / 2500#

TEST PRESSURE

TESTING	HYDRAULIC			PNEUMATIC
	800#	1500#	2500#	
BODY	3000 PSIG	5400 PSIG	9060 PSIG	-
SEAT	2200 PSIG	4000 PSIG	6800 PSIG	80 PSIG

@ 800#

SIZE	L	H	SCR. ENDS		SW. ENDS		
			ØC	E	ØD		F(Min.)
					Max.	Min.	
15	85	55	1/2"	13.56	22.22	21.72	9.65
20	92	60	3/4"	13.87	27.56	27.05	12.7
25	105	72	1"	17.35	34.29	33.78	12.7
40	127	95	1.1/2"	18.38	49.15	48.64	12.7
50	140	100	2"	19.23	61.62	61.11	15.75

@ 1500#

SIZE	L	H	SCR. ENDS		SW. ENDS		
			ØC	E	ØD		F(Min.)
					Max.	Min.	
15	92	60	1/2"	13.56	22.22	21.72	9.65
20	105	72	3/4"	13.87	27.56	27.05	12.7
25	127	95	1"	17.35	34.29	33.78	12.7
40	140	100	1.1/2"	18.38	49.15	48.64	12.7

Size : 1/4" (6 mm) to 2" (50 mm)
 Class : 800# / 1500# / 2500#
 End : Threaded / Socket Weld / Butt Weld Ends
 Design : API-602 / BS 5352 / B16.11 / B16.25
 Features : Bolted / Welded Bonnet
 *Special Material & Higher Size also available on request.

AI 6D Short Pattern Single Plate Wafer Check Valve



API 6D Long Pattern Dual Plate Check Valve



Parameter : Compliance to
 Design : API 6D / API 594
 Pressure Temperature Rating : ASME B 16.34
 Face to Face / End to End : API 6D
 End Connection Dimensions : Wafer to suit PN 20 (ASME 150 Class), PN 50 (ASME 300 Class), PN 100 (ASME 600 Class)
 Inspection & Testing : ISO 5208 / API 598

ISO PN 20 / ASME 150 CLASS

	50	65	80	100	150	200	250	300	350	400	450	500
A	30	38	52	72	114	157	195	230	270	310	360	406
B	19	19	19	19	19	29	29	38	44	51	60	64
C	104.5	120	133	171	219	276	337	406	446	508	542	598

Parameter : Compliance to
 Design : API 6D - ISO 14313 / API 594
 Pressure Temperature Rating : ASME B 16.34
 Face to Face / End to End : API 6D
 End Connection Dimensions : Wafer to suit PN 20 (ASME 150 Class), PN 50 (ASME 300 Class), PN 100 (ASME 600 Class)
 Inspection & Testing : ISO 5208 / API 598 / BS 6755 PART I

ISO PN 20 / ASME 150 CLASS

	50	65	80	100	150	200	250	300	350	400	450	500
A	101	120	133	171	218	276	336	406	447	511	546	603
B	60	67	67	73	98	127	146	181	184	191	203	219
C	60	73	89	114	168	219	273	324	356	406	457	508

**Our
Product
Range**



Gate Valve - 150# / 300# / 600# / 900# / 1500#



ASA Globe Valve - 150# / 300# / 600# / 900#



Swing Check Valve - 150# / 300# / 600# / 900#



DIN Globe Valve (PN 16 / PN 25 / PN 40)



"Y" Strainer - PN 16 / PN 25 / PN 40 / 150# / 300#



Center Disc & Offset Disc Design Butterfly Valve



Forged Steel Gate Valve - 800# / 1500# / 2500#



Forged Steel Globe Valve - 800# / 1500# / 2500#



Forged Steel Lift Check Valve - 800# / 1500# / 2500#



AI 6D Short Pattern Single Plate Wafer Check Valve



API 6D Long Pattern Dual Plate Check Valve

Also as per your Specifications & Design



dintech
VALVES Pvt. Ltd.

An ISO 9001:2008 Company

Manufacturers of all kinds of
INDUSTRIAL VALVES

C/2, A/1, Odhav GIDC,
B/h. Torrent Power Sub Station,
Near C.M.C., Odhav, Ahmedabad 382 415.

Phone : 079 - 2289 0221,
93758 01581, 97270 74477

E-mail : info@dintechvalve.co.in
sales@dintechvalve.co.in

Web site : www.dintechvalve.co.in
www.dintechvalves.com



All the specifications, particulars and illustrations are subject to alterations in respect of modifications in design and construction.